

AFINITICA® BX05 COLOR

PRODUCT DESCRIPTION

Technology	Cyanoacrylate
Chemical Type	Methoxyethyl Cyanoacrylate
Appearance (uncured)	Fluorescent yellow liquid
Components	One part
Viscosity	High
Cure	Humidity

AFINITICA® BX05 COLOR has low odour and low blooming properties and is particularly suitable for applications where vapor control is difficult. AFINITICA® BX05 COLOR is particularly suited for bonding porous or absorbent materials such as wood, paper, leather and fabric. The product is non-irritant.

TYPICAL PROPERTIES OF UNCURED MATERIAL

Specific gravity, 25 °C, g/cm ³ :	1.12
Viscosity, Brookfield, 25 °C, mPa·s (cP):	
Spindle 03, speed 30 rpm	1100 to 1750

TYPICAL CURING PERFORMANCE

Under normal conditions, the atmospheric moisture initiates the curing process. Although full functional strength is developed in a relatively short time, curing continues for at least 24 hours before full chemical resistance is developed.


FIXTURE TIMES

Fixture time is the time at which an adhesive bond (250 mm²) is capable of supporting a 3 kg load for 10 seconds. The fixture time will depend on the substrate. The table below shows the fixture time for different substrates using lap shears.

	Time (s)
Pine Wood	20–50
Beech Wood	15–60
ABS	25–55
Polycarbonate	45–120
Aluminium A5754	35–90
Mild steel	10–60

CURE SPEED vs. SUBSTRATE

The rate and strength of cure will depend on the substrate used. The graph below shows the tensile shear strength developed with time on different materials and tested according to ISO 4587.

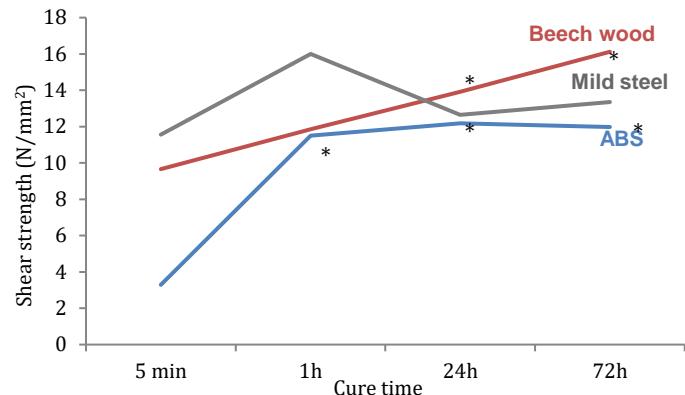

* Substrate Failure

TYPICAL PERFORMANCE OF CURED MATERIAL

TENSILE SHEAR STRENGTH

The shear strength will depend on the substrate. The Table below shows the shear strength for different substrates using lap shears according to ISO 4587.

Cured for 24h at 22 °C

Strength (N/mm ²)	
Pine Wood	8–11*
Beech Wood	11–15*
ABS	11–12*
Aluminium A5754	9–12
Mild steel	12–18

* Substrate Failure

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Safety Data Sheet (SDS): SDS242931

Directions for use:

- 1) Before applying the glue, make sure the gluing surface is clean, dry and free of grease.
- 2) Apply adhesive to one of the surfaces. Do not use items like tissue or a brush to spread the adhesive.
- 3) Assemble the parts within a few seconds. The parts should be accurately located, as the short fixture time leaves little opportunity for adjustment.
- 4) Bonds should be held fixed or clamped until adhesive has fixture.

- 5) Product should be allowed to develop full strength before subjecting to any service loads (typically 24 to 72 hours after assembly, depending on bond gap, materials and ambient conditions).
- 6) Optimal Storage: 2 °C to 8 °C. Storage below 2 °C or greater than 8 °C can adversely affect product properties
- 7) Product shelf-life: 12 months

Conversions:

(°C x 1.8) + 32 = °F
kV/mm x 25.4 = V/mil
mm / 25.4 = in
µm / 25.4 = mil
N x 0.225 = lb
N/mm x 5.71 = lb/in
N/mm² x 145 = psi
MPa x 145 = psi
N·m x 8.851 = lb·in
N·mm x 0.142 = oz·in
mPa·s = cP

NOTE

The data contained herein are furnished for information only and are believed to be reliable. AFINITICA cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, AFINITICA Technologies s.l. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of AFINITICA's products. AFINITICA specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits. The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any AFINITICA Technologies patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.